

constant current source side gates of + +45V sense of + LED cathodedrive from + LED anode to drive of --45V _ gates of sense of signal ground

single-ended drive side


Parts placement on main boards

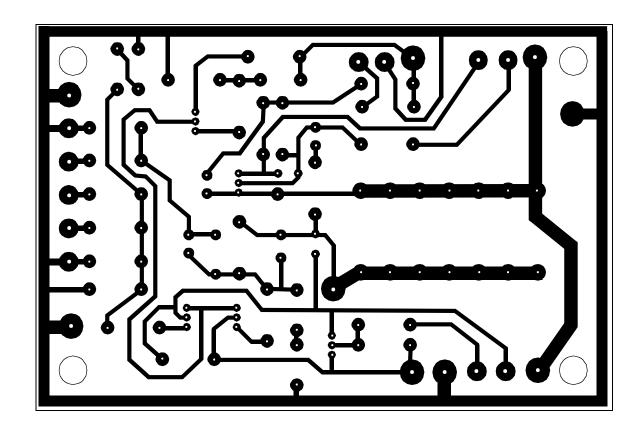



PCB Artwork

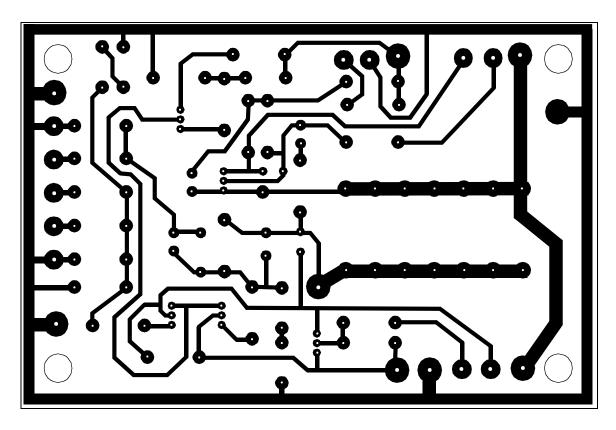


Double Artwork for 6x9 board

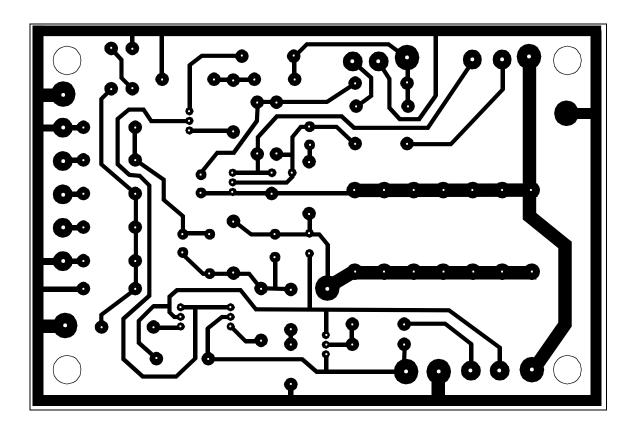


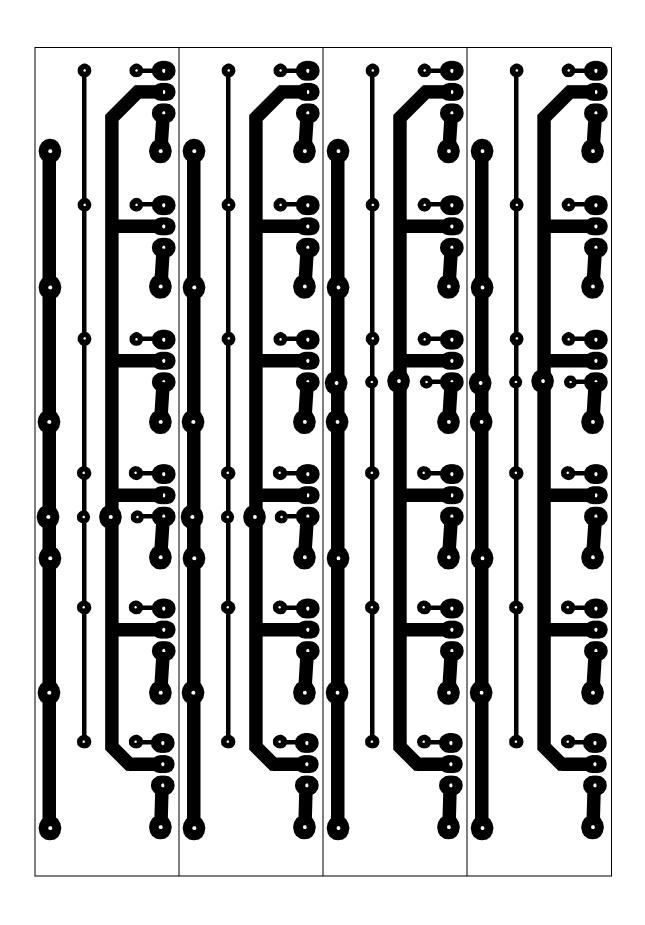

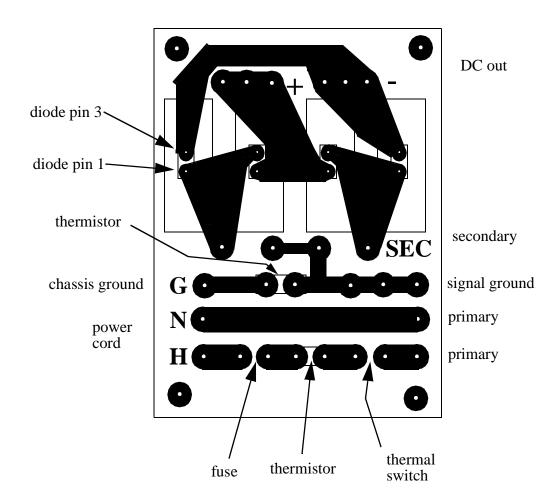

Rectifier Board Layout and connections. Uses gynormous 600V, 25A HEXFRED diodes. (Digikey part# HFA25TB60) but you can use whatever you think will work.

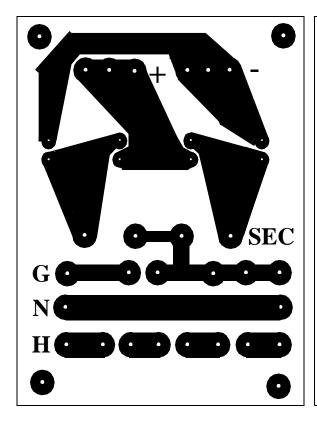

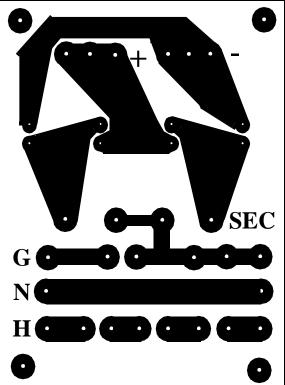

Double artwork for 4x6 board